



Glue saddle without reduction




These gluesaddles are available with different diameters and spigot lengths.

A	B	C	C	C	C
Ø200mm	Ø160mm	200mm	300mm	400mm	500mm
Ø200mm	Ø200mm	200mm	300mm	400mm	500mm
Ø250mm	Ø160mm	200mm	300mm	400mm	500mm
Ø250mm	Ø200mm	200mm	300mm	400mm	500mm
Ø250mm	Ø250mm	200mm	300mm	400mm	500mm
Ø315mm	Ø160mm	200mm	300mm	400mm	500mm
Ø315mm	Ø200mm	200mm	300mm	400mm	500mm
Ø315mm	Ø250mm	200mm	300mm	400mm	500mm
Ø315mm	Ø315mm	200mm	300mm	400mm	500mm

To seal the gluesaddle from above a plug type 3 can be used.

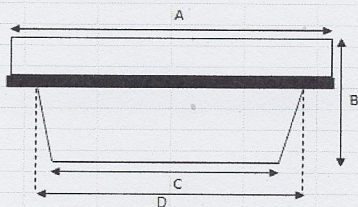

	A	B	C	D
Ø200mm	230	100	149	175
Ø250mm	280	100	199	225
Ø315mm	345	100	265	284



240mm

Stainless steel hook standard (longer hooks on request)

The plug always needs to be filled with concrete for centering of the hook and to aggravate the plug. At additional costs we can fill up the plug for you.

For the connection between the saddle and the PVC pipe it's best to use a flexible and adherent glue. Sikaflex 11FC is very suitable for this. When you don't use the Sikaflex, it's advisable to use a gap-filling glue.